


Solenoid valves for steam and high temperatures

2/2 way - Normally Closed - Diaphragm pilot operated

Fittings: G = 3/8" - 1"

Series **156.2**





N.C.

Normally closed

Coil energised - open

Coil de-energised - closed

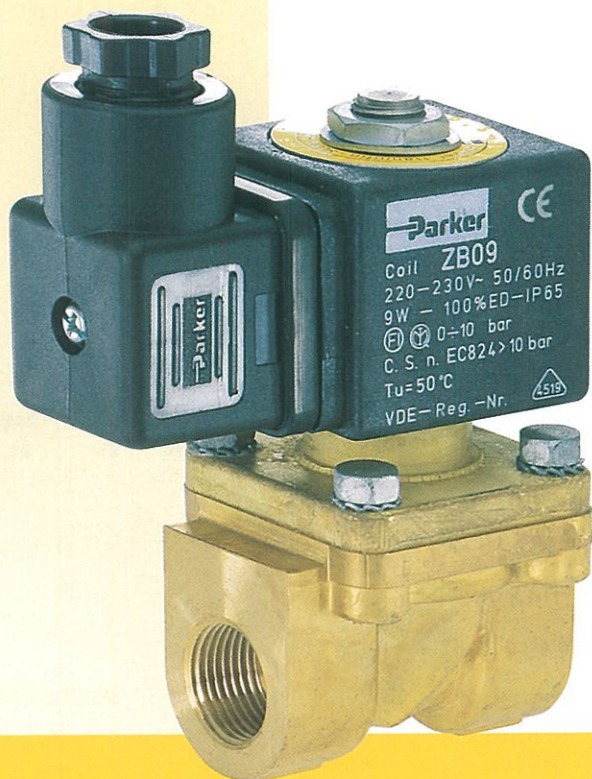

General description:

PARKER series 156.2 solenoid valves are diaphragm pilot operated and require a minimum differential pressure to operate. They are used for general applications with media such as **steam and superheated water**.

Series 156.2 valves are **normally closed**.

Temperatures:

The working temperature for media is:

maximum	+160°C
minimum	-30°C

The maximum ambient temperature is:

with class coils "F"	+50°C
with class coils "H"	+80°C

Application:

Series 156.2 solenoid valves are ideal for automatic control of steam and superheated water in a wide range of applications such as:

- Sterilisers;
- Ironing machines;
- Hospital equipment;
- Tanning plants;
- Tobacco plants.

Coils:

For series 156.2 valves class "F" coils (**155°C**) are available encapsulated in thermoplastic containing 30% glass fiber (types: ZB, YB) and class "H" coils (**180°C**) are available encapsulated in thermoplastic containing 40% glass fiber (type ZH).

All the coils are for continuous service, 100% E.D.

The rated voltage tolerance is:

±10% for A.C. power supply

The "Z" and "Y" coils can be used on a.c. with a frequency of 50/60 Hz (dual-frequency).

The "Z" coils have Faston terminals for **DIN 43650A** connectors with protection to **IP65**. The "Y" coil has terminals with 2 x 1,000 mm cables with protection to **IP67**.

Installation:

The valves can be mounted in any position without jeopardising their operation. It is however advisable to install them with the coil in a vertical position above the body.

Approvals:



- Coil certification:
ZB 09 24V/50-60Hz, 115V/50-60Hz, 220-230V/50-60Hz, 240V/50-60Hz
YB 09 220-230V/50-60Hz



- For the coils:
ZB 09 220-230V/50-60Hz, 240V/50-60Hz
YB 09 220-230V/50-60Hz



- UL Recognized Comp. Mark for the coils:
ZB 09 24V/60Hz, 110-120V/60Hz, 208-240V/60Hz
YB 09 24V/60Hz, 110-120V/60Hz, 208-240V/60Hz

Series **156.2**

MATERIALS

- Valve body: OT58 UNI 5705 brass stamping
- Seals: Pilot of Ruby - diagram of PTFE (Teflon)
- Enclosing tube: AISI 304 stainless steel
- Plunger: AISI 430F stainless steel
- Spring: AISI 302 stainless steel
- Shading ring: Copper

ELECTRICAL FEATURES


Coil type []		Power [W]		Insulat. class
A.C.(~)	D.C.(=)	A.C.(~)	D.C.(=)	
ZB 09	-	9	-	F
YB 09	-	9	-	F
ZH 14	-	14	-	H

SPECIFICATION

Fittings Ø G	Valve type	Nominal orifice Ø	Flow coefficient Kv	Minimum pressure	Max differential pressure (M.O.P.D.)		Coil type	Weight	Notes
["]	[]	[mm]	[m³/h]	[bar]	in A.C.(~) [bar]	in D.C.(=) [bar]	[]	[Kg]	[]
3/8	156.2 I	10	1,32	0,5	16	-	Z - Y	0,580	1 - 2
1/2	156.2 A	10	1,44	0,5	16	-	Z - Y	0,580	1 - 2
3/4	156.2 C	18	2,22	0,5	14	-	Z - Y	1,080	1 - 2
1	156.2 D	18	2,52	0,5	14	-	Z - Y	1,080	1 - 2


Note: 1) NP (nominal pressure): 25 bar. 2) Maximum pressure for steam: 6.5 bar (160 °C).

DIMENSIONS

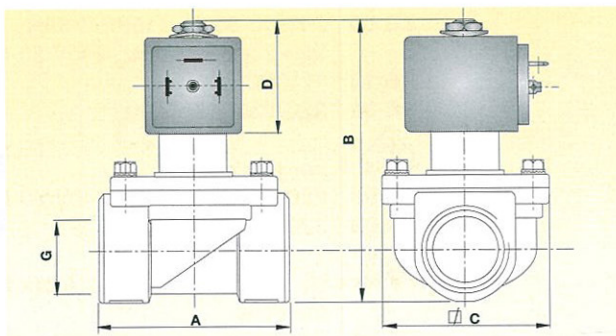

Fittings Ø G	A	B	C	D
["]	[mm]	[mm]	[mm]	[mm]
3/8	48	85,0	40	37,5
1/2	48	85,0	40	37,5
3/4	48	85,0	40	37,5
1	60	93,5	51	37,5

ORDER CODE

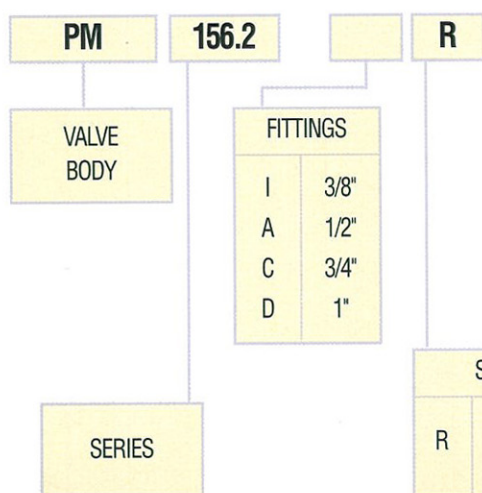

Coil type	24 V		115V		220-230 V		240 V		12 V		24 V	
	50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz		d.c.		d.c.	
ZB 09	●		●		●		●					
YB 09	●		●		●							
ZH 14	●		●		●							

Coil type	24 V / 60 Hz	110-120 V / 60 Hz	208-240 V / 60 Hz
ZB 09 UL	●	●	●
YB 09 UL	●	●	●

Note: Valve supplied with body part (PM) and coil separate.

Connectors to be ordered separately.