

KITZ

F SERIES

Pneumatic Actuators for Ball and Butterfly Valves



KITZ CORPORATION

KITZ F SERIES



Pneumatic Valve Actuators





Featured by the utmost handling ease and extended service life with high operational efficiency

■ Easy answers to engineering modification requirements

- Position indicator can be adjusted by 90°, when actuator mounting position is turned by 90°, for local piping or operating convenience.
- Actuator shaft rotating angle (valve opening/closing range) can be adjusted with optional longer stopper bolt to full 90° rotation from standard range of plus/minus 7°.

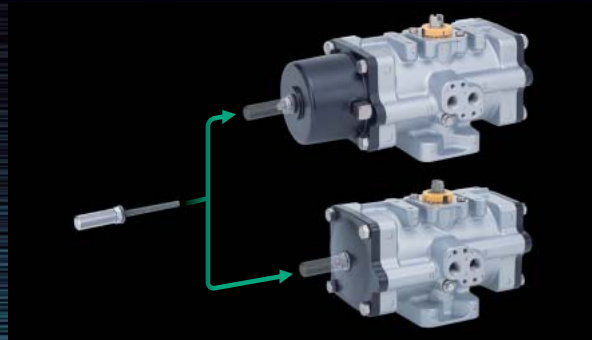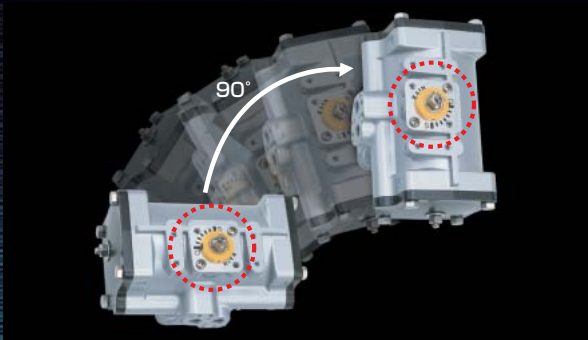

- Standard AIR-FAIL-CLOSE mode can be converted to AIR-FAIL-OPEN mode by means of mounting of spring cartridge on the actuator housing reverse end. (spring-return type only)
- Replacing modular units of blowoff-proof spring cartridge enables accommodation of higher output torque or lower operating pressure. (spring-return type only)

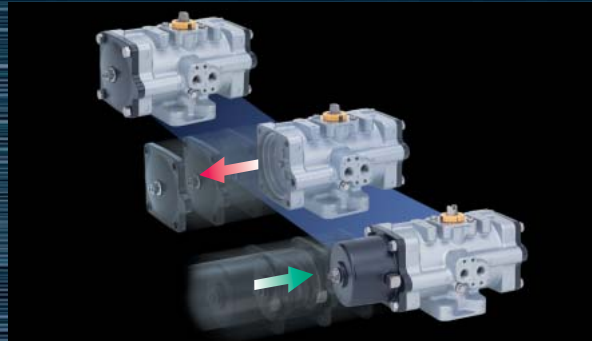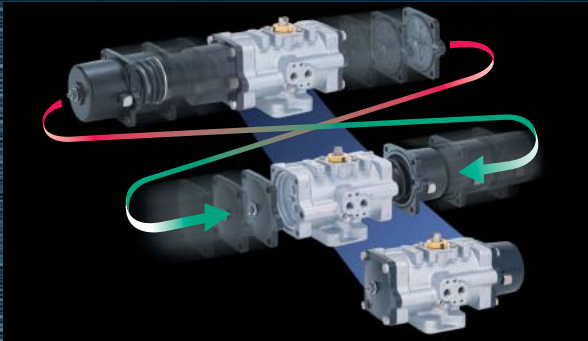

- Valve actuation mode is convertible between double-action and spring-return with addition or deletion of spring cartridge.

■ Economic advantage

Use of monobloc casting of piston-rack assembly results in reduced housing dimensions by 10% to 15% (compared with KITZ D Series actuators), and saves air consumption for valve actuation.

■ Extended service life with monobloc casting of two pistons and a gear-rack

Threads of a gear-rack is positioned in the center of actuator housing, and two pistons are cast in integration with gear-rack as one-piece unit. This helps to keep piston position in parallel during actuator travel.

■ Light and compact housing


Employment of diecast aluminum for housings and piston-rack assemblies has reduced the actuator weight by 20% to 40% (compared with KITZ D Series actuators) for better torque-to-weight ratio.

■ Conformity to international standards


NAMUR VDI/DE 3845 designs are used for tubeless mounting of solenoid valve and switchbox on actuator housing besides the conformity to ISO 5211 requirements for valve mounting flanges. The stem top design also conforms to NAMUR dimensions.

■ Actuators can be directly mounted to KITZ DJ, XJ Series Butterfly Valves

■ Optional adaptors (connectors) to the valves on the bottom of actuators can be provided for wide mounting variations

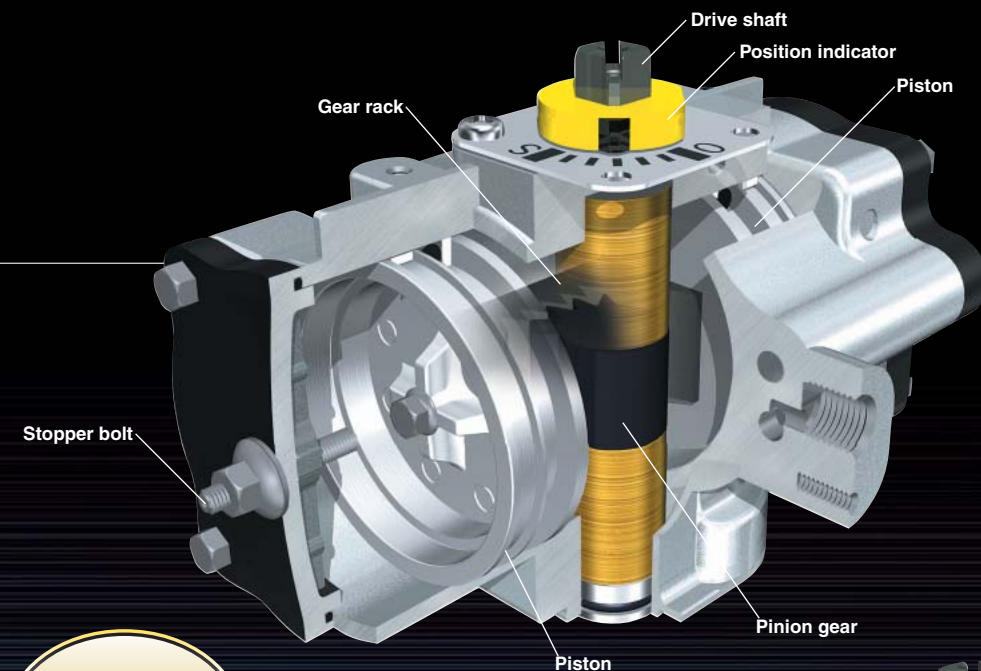

**Double Action
Type
FA**

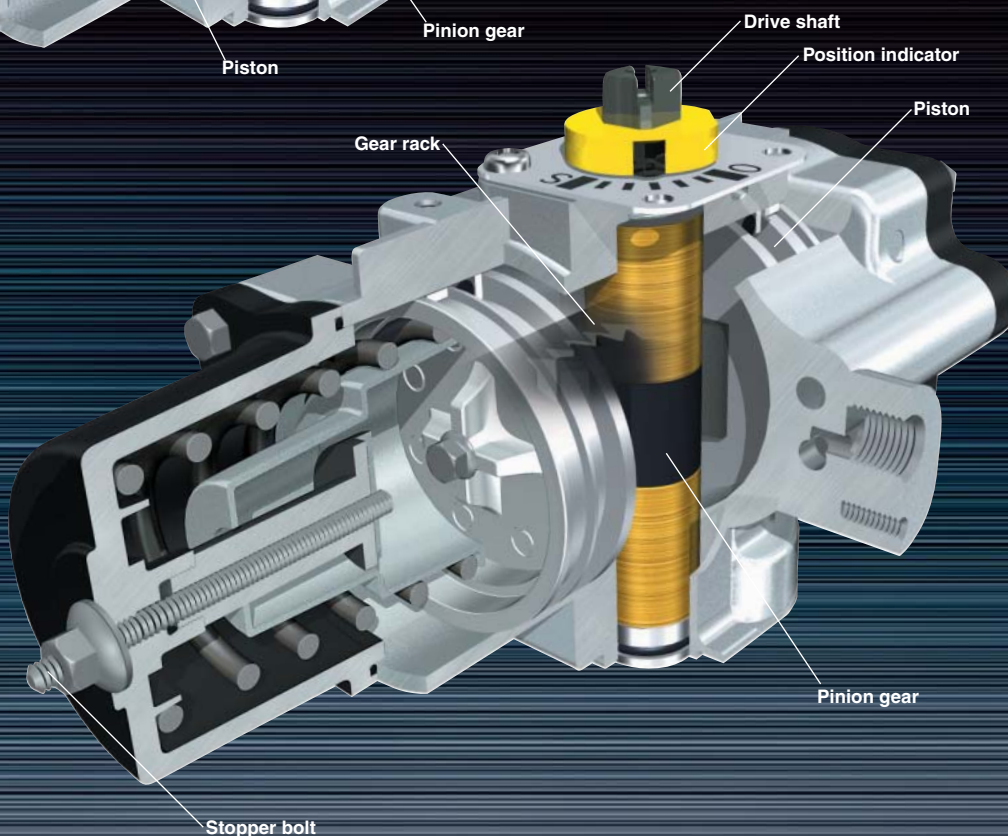

**Spring Return
Type
FAS**

● Specifications

Operating medium	Compressed instrumentation air or nitrogen gas
Operating pressure	Standard operating pressure 0.39 MPa
Operating pressure range	0.29 MPa to 0.69 MPa*
Cylinder test pressure	0.97 MPa
Shaft rotating angle	90°±7°
Service temperature	−20°C to +80°C (Supply air should not be frozen.)
Opening degree indication	Indicator has 15 degree graduation
Valve mounting flange	ISO 5211
Accessory mounting connection	NAMUR VDI/VDE 3845
Coating	Baked Polyester Resin Coating

* Be consulted by KITZ for non-standard operating pressure.

● Product Coding

FAS-2

Type of actuator

F

Type of operation:

No code·····Double action
S··········Spring return

Actuator size:

1········ Size 1 4········ Size 4
2········ Size 2 5········ Size 5
3········ Size 3 6········ Size 6

● Operating Mechanism

■ Double action (Type FA)

- (1) Air pressure supplied into the chamber **A** through port ①, pushes gear rack with two pistons outward, and discharges the air residue through port ②.
- (2) The gear rack rotates the pinion gear and the shaft counter-clockwise, to drive the valve.
- (3) Reverse supply of the air pressure activates reverse valve operation.

Cylinder volume

unit: ℓ

Type	Chamber A	Chamber B
FA-1	0.15	0.15
FA-2	0.31	0.31
FA-3	0.61	0.61
FA-4	1.29	1.29
FA-5	2.29	2.29
FA-6	5.27	5.27



■ Spring return (Type FAS)

- (1) Air pressure supplied into the chamber **A** through port ①, pushes gear rack with two pistons outward, compresses the springs and discharges the air residue through port ②.
- (2) The gear rack rotates the pinion gear and the shaft counter-clockwise, to drive the valve.
- (3) At the moment the air in the chamber **A** is discharged through the solenoid valve, the spring force pushes the pistons to the reverse direction, and the gear rack activates rotation of the shaft clockwise to reversely operate the valve.

Cylinder volume

unit: ℓ

Type	Chamber A
FAS-1	0.15
FAS-2	0.31
FAS-3	0.61
FAS-4	1.29
FAS-5	2.29
FAS-6	5.27

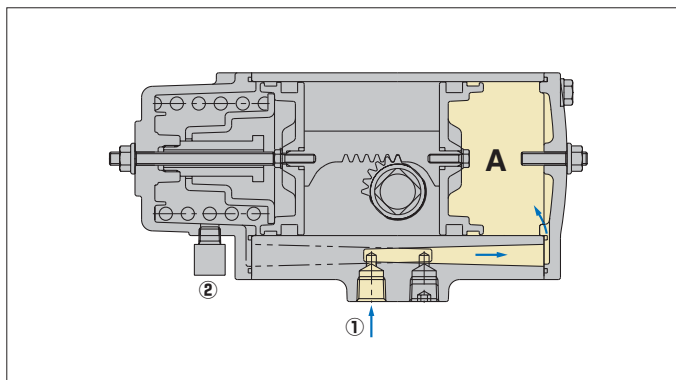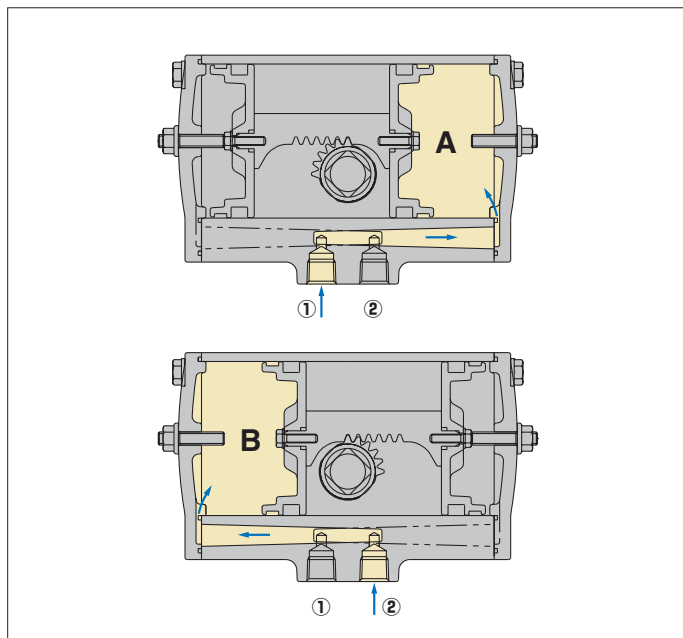

● Actuator Output Torque

■ Double action

unit: N·m

Type	Operating pressure (air)		
	0.29MPa	0.39MPa	0.49MPa
FA-1	14.12	18.83	23.54
FA-2	33.41	44.54	55.68
FA-3	67.37	89.83	112.30
FA-4	134	179	223
FA-5	244	332	407
FA-6	588	784	980

■ Double action

unit: LB.-IN.

Type	Operating pressure (air)		
	45psi	60psi	75psi
FA-1	125	166	208
FA-2	296	394	493
FA-3	597	795	991
FA-4	1186	1584	1974
FA-5	2160	2939	3602
FA-6	5204	6939	8674

■ Spring return

unit: N·m

Type	Spring rating	Operating pressure (air)						Operating force (spring)	
		0.29MPa		0.39MPa		0.49MPa			
		0°※1	90°※2	0°※1	90°※2	0°※1	90°※2	0°※3	90°※4
FAS-1	3K	9.25	6.51	14.06	11.32	18.87	16.12	5.18	7.92
	4K	—	—	11.66	7.64	16.47	12.45	7.58	11.60
	5K	—	—	—	—	14.60	9.60	9.44	14.45
FAS-2	3K	20.19	13.68	31.32	24.81	42.45	35.95	13.21	19.71
	4K	—	—	26.76	18.02	37.89	29.15	17.76	26.50
	5K	—	—	—	—	33.39	22.43	22.26	33.22
FAS-3	3K	42.83	32.72	64.00	52.89	87.16	75.06	23.68	35.79
	4K	—	—	53.52	35.54	75.69	57.71	35.16	53.14
	5K	—	—	—	—	66.79	44.41	44.06	66.43
FAS-4	3K	83.00	59.40	129	106	175	152	55.60	79.10
	4K	—	—	110	74.60	157	121	74.30	110
	5K	—	—	—	—	138	93.20	93.10	138
FAS-5	3K	155	109	240	194	325	279	101	147
	4K	—	—	203	138	288	222	138	203
	5K	—	—	—	—	255	171	171	254
FAS-6	3K	354	249	551	446	748	643	237	342
	4K	—	—	473	326	670	510	326	475
	5K	—	—	—	—	591	392	394	593

■ Spring return


unit: LB.-IN.

Type	Spring rating	Operating pressure (air)						Operating force (spring)	
		45psi		60psi		75psi			
		0°	90°	0°	90°	0°	90°	0°	90°
FAS-1	45psi	82	58	124	100	167	143	46	70
	60psi	—	—	103	68	146	110	67	103
	75psi	—	—	—	—	129	85	84	128
FAS-2	45psi	179	121	277	220	376	318	117	174
	60psi	—	—	237	159	335	258	157	235
	75psi	—	—	—	—	296	199	197	294
FAS-3	45psi	379	290	566	468	771	664	210	228
	60psi	—	—	474	315	670	511	311	470
	75psi	—	—	—	—	591	393	390	588
FAS-4	45psi	735	526	1142	938	1549	1549	492	700
	60psi	—	—	974	660	1390	1390	658	974
	75psi	—	—	—	—	1221	1221	824	1221
FAS-5	45psi	1372	965	2124	1717	2877	2877	894	1301
	60psi	—	—	1797	1221	2549	2549	1221	1797
	75psi	—	—	—	—	2257	2257	1514	2248
FAS-6	45psi	3133	2204	4877	3948	6621	6621	2098	3027
	60psi	—	—	4187	2770	5930	4514	2788	4204
	75psi	—	—	—	—	5231	3470	3487	5249

※1 At starting point (close position) ※2 At ending point (open position) ※3 At ending point (close position) ※4 At starting point (open position)

● Dimensions


Double action (Type FA)

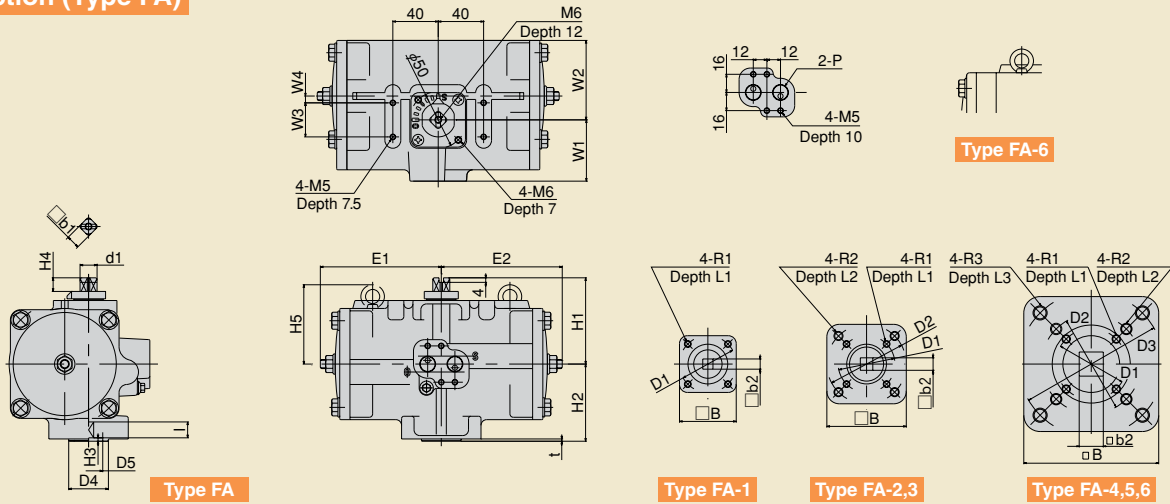

unit:mm

Type	E1	E2	W1	W2	W3	W4	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	d1	b1	b2	B	ℓ	t	R1×L1	R2×L2	R3×L3	P	Weight (kg)
FA-1	87	87	50	54	30	0	70	55	3	12	—	50	—	—	35	25	15	12	9	50	16	2	M6×9	—	—	Rc $\frac{1}{4}$	1.7
FA-2	107	107	54	70	30	6	80	68	3	12	—	50	70	—	35	30	15	12	11	70	16	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	2.9
FA-3	128	128	57	87	30	13	86	78	3	12	—	50	70	—	35	32	21	17	13	70	25	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	4.4
FA-4	160	160	68	111	30	21	108	96	4	12	—	50	70	102	55	40	21	17	17	95	27	3	M6×9	M8×12	M10×15	Rc $\frac{1}{4}$	8.0
FA-5	208	208	78	135	30	30	132	116	5	20	—	70	102	125	55	50	29	23	27	113	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	13.6
FA-6	268	268	101	178	30	45	152	125	5	20	160	70	102	125	70	60	41	32	27	134	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	28.2


Spring return (Type FAS)

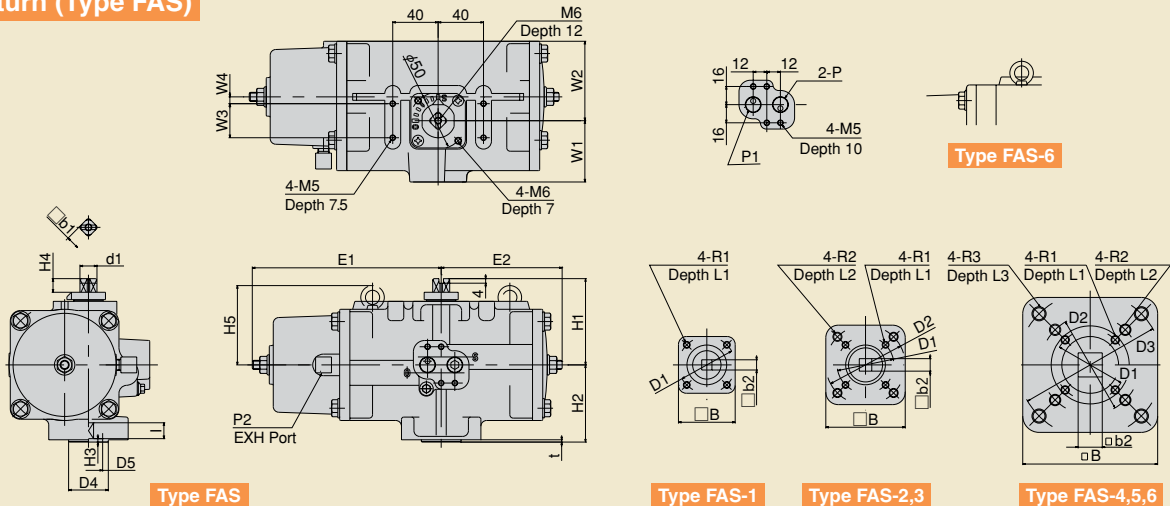


unit:mm

Type	E1	E2	W1	W2	W3	W4	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	d1	b1	b2	B	ℓ	t	R1×L1	R2×L2	R3×L3	P1	P2	Weight (kg)
FAS-1	132	87	50	54	30	0	70	55	3	12	—	50	—	—	35	25	15	12	9	50	16	2	M6×9	—	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	2.1
FAS-2	166	107	54	70	30	6	80	68	3	12	—	50	70	—	35	30	15	12	11	70	16	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	3.8
FAS-3	203	128	57	87	30	13	86	78	3	12	—	50	70	—	35	32	21	17	13	70	25	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	6.4
FAS-4	290	160	68	111	30	21	108	96	4	12	—	50	70	102	55	40	21	17	17	95	27	3	M6×9	M8×12	M10×15	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	12.8
FAS-5	363	208	78	135	30	30	132	116	5	20	—	70	102	125	55	50	29	23	27	113	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	23.4
FAS-6	483	268	101	178	30	45	152	125	5	20	160	70	102	125	70	60	41	32	27	134	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	50.0

Optional Accessories

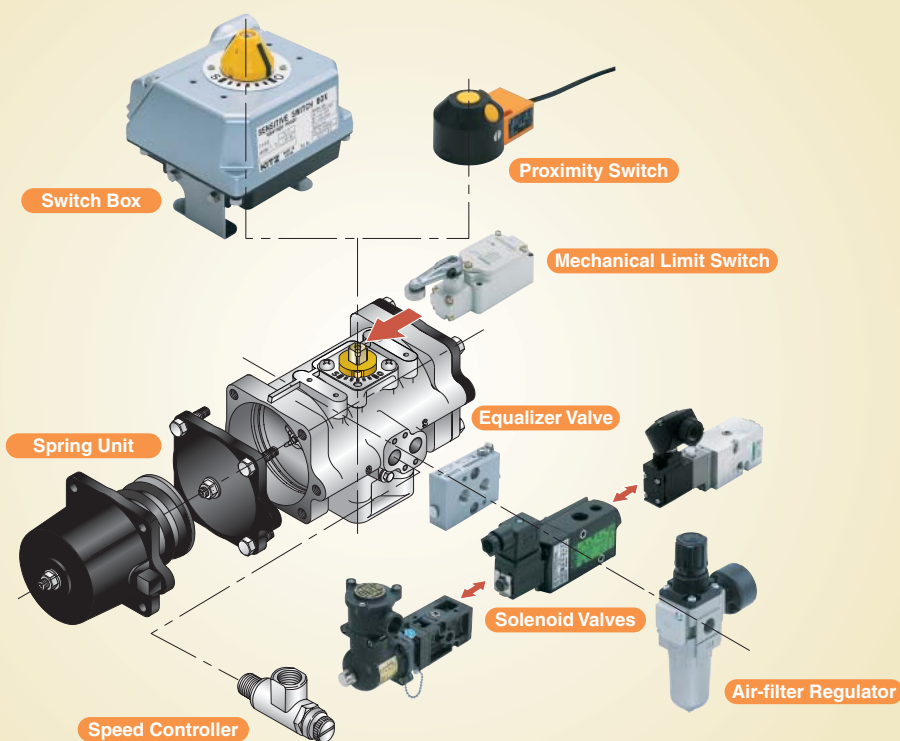

Construction Details

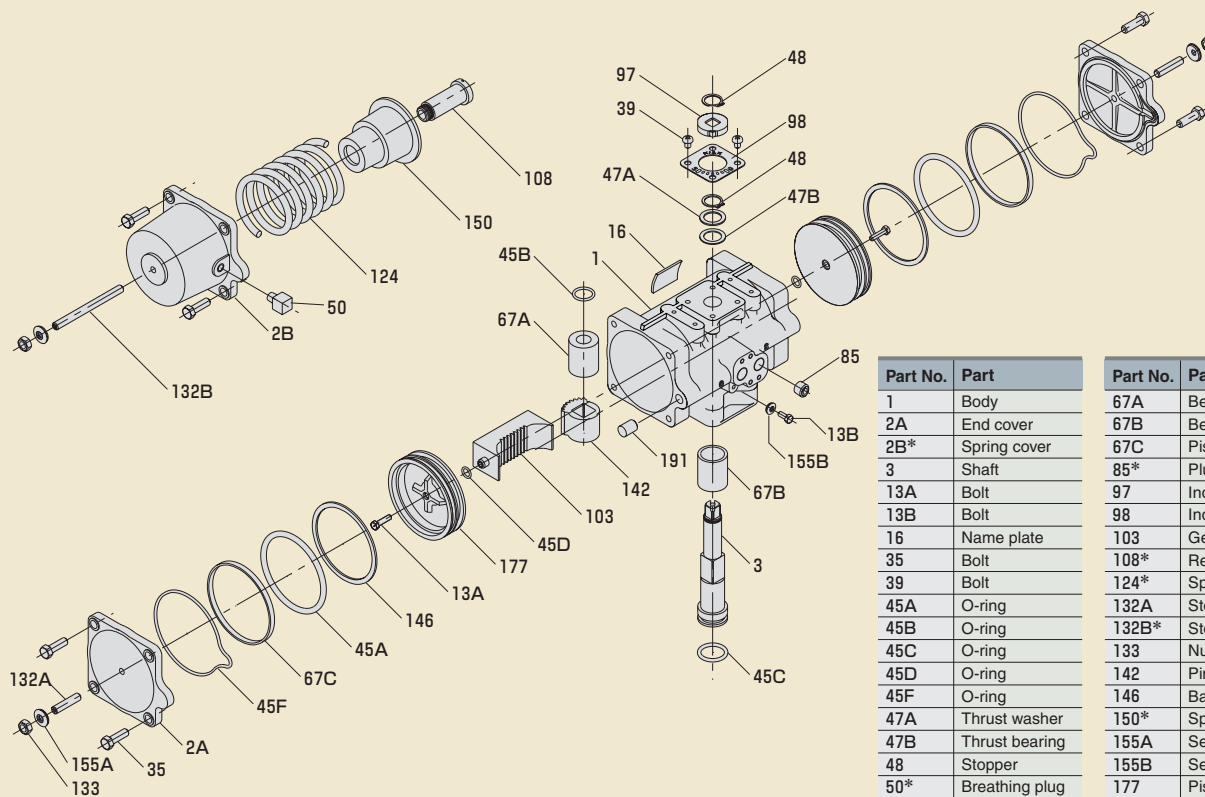

Part No.	Part
1	Body
2A	End cover
2B*	Spring cover
3	Shaft
13A	Bolt
13B	Bolt
16	Name plate
35	Bolt
39	Bolt
45A	O-ring
45B	O-ring
45C	O-ring
45D	O-ring
45F	O-ring
47A	Thrust washer
47B	Thrust bearing
48	Stopper
50*	Breathing plug

Part No.	Part
67A	Bearing
67B	Bearing
67C	Piston bearing
85*	Plug
97	Indicator
98	Indicator plate
103	Gear rack
108*	Retainer guide
124*	Spring
132A	Stopper bolt
132B*	Stopper bolt
133	Nut
142	Pinion gear
146	Back-up ring
150*	Spring retainer
155A	Seal washer
155B	Seal washer
177	Piston
191	Rubber Plug (FAS-6 only)

*Spring Return type.

● Actuator Sizing

The sizing shown below is based on the following conditions.

■ Ball valves

Operating pressure	0.39 MPa
Fluid type	• Fresh water or lubricant, Max. 1.96 MPa (*The figures shown in the table indicate service pressure limit. Unit MPa) • Air gas or steam, Max. 0.69 MPa
Fluid temperature	−20°C to +230°C (Limited within seat rating)

Be consulted by KITZ, if:

- ① Valves handle
 - a. Solvents, such as kerosene, naphtha or alcohol.
 - b. Powder, slurry or dehydrated cake.
 - c. Vacuum or any other service requiring oil free treatment.
- ② Valves are not operated for more than 3 months.
- ③ Valves are used as a control valve.

■ Butterfly valves

Operating pressure	0.39 MPa
Fluid type	Smooth fluid, Max. 0.98 MPa for class JIS 10K Max. 1.57 MPa for class JIS 16K and BS PN16 • Fresh water, lubricant (Max 1,000 cp)
Velocity	Up to 2m/sec
Fluid temperature	0°C to Max. working temperature

Type, temperature and pressure of the fluid shall be determined by the rubber seat. Valve selection must properly be made based on these conditions.

Extra care shall be taken on velocity, if valves are used at the pump exit.

■ Type FA Double action

Type	Bore	Shell Material	Class	Conection	Product coding	Size	A	10	15	20	25	32	40	50	65	80	100	125	150	200	250	300
						B	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12	
Ball Valve	Full Port	Cast Iron	JIS 10K	Threaded	10FCT																	
				Flanged	10FCTB															1.0	1.4	
		Ductile Iron			10STBF																1.0	1.4
				Stainless Steel	JIS 10K Class 150	Flanged	10UT															
		10UTB, 150UTB							FA-1			FA-2	FA-3	FA-4		FA-5 1.0	FA-6 1.4					
		20UTB, 300UTB															FA-6					
		10SCTB, 150SCTB																FA-6				
		Carbon Steel	JIS 20K Class 300	20SCTB, 300SCTB													FA-6					
	Reduced Port			Stainless Steel	JIS 10K Class 150	Flanged	10UTR, 150UTR															
							20UTR, 300UTR															
				Carbon Steel	Class 150		150SCTR													FA-5		FA-6 1.4
		Class 300	300SCTR																FA-6			
	Stainless Steel	JIS 10K	10UTB4T (L) A																			
			10UTBLN																			
Butterfly Valve	Aluminum	JIS 10K	Wafer		10XJME																	
					10XJSME																	
	Ductile Iron	JIS 16K BS PN16			10DJ																	
					16DJ, PN16DJ																	

● Actuator Sizing

■ Type FAS Spring Return

Type	Bore	Shell Material	Class	Conection	Size Product coding	A	10	15	20	25	32	40	50	65	80	100	125	150	200	250	300	
						B	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12	
Ball Valve	Full Port	Cast Iron	JIS 10K	Threaded	10FCT						1.4											
				Flanged	10FCTB						1.4				1.4		1.0					
		Ductile Iron			10STBF					1.4				1.4		1.0						
		Stainless Steel		Flanged	Threaded	10UT					1.4											
			JIS 10K Class 150		10UTB, 150UTB			FAS-1		FAS-2 1.4	FAS-3	FAS-4		FAS-5 1.4		FAS-6 1.0						
			JIS 20K Class 300		20UTB, 300UTB						1.4											
			Carbon Steel		JIS 10K Class 150	10SCTB, 150SCTB					1.4					1.4		1.0				
		JIS 20K Class 300		20SCTB, 300SCTB					1.4													
	Reduced Port	Stainless Steel	Flanged	JIS 10K Class 150	10UTR, 150UTR								FAS-3				1.4		1.0			
				JIS 20K Class 300	20UTR, 300UTR																	
		Carbon Steel		Class 150	150SCTR											1.4		1.0				
				Class 300		300SCTR																
		Stainless Steel	JIS 10K		10UTB4T (L) A			FAS-2 1.4	FAS-3 1.4	FAS-3 1.4		FAS-4 1.4	FAS-5 1.4	FAS-6 1.4								
					10UTBLN																	
Butterfly Valve	Aluminum	JIS 10K	Wafer		10XJME																	
					10XJSME																	
	Ductile Iron				10DJ																	
				JIS 16K BS PN16	16DJ, PN16DJ																	

● Precautions

CAUTION

- Ensure to read and follow instructions of operation manual when handling F Series actuators.
- Ensure to select F Series actuators in consideration of specifications of this catalog.
- Refer to the valve catalogs for detailed specifications of the valves to mount actuators.
- Cylinder bodies of double action type and spring return type are interchangeable. Double action type can be converted to spring return type by changing spring cartridge.
- Actuator sizing may differ for the particular service conditions when converting double action type to spring return type. Contact KITZ Corporation for proper sizing.
- Standard operating pressure built-in spring return type is 4K. (0.39 to 0.69MPa)
- Spring cartridge with different operating pressures 3K (0.29 to 0.69MPa) and 5K (0.49 to 0.69MPa) is optionally available. Contact KITZ Corporation for actuator sizing of 3K and 5K types.
- Do not use excessive operating pressures to actuators, which will damage internal parts and result in malfunction.
- Ensure to use compressed instrumentation air or nitrogen gas as operating medium.
- It will damage internal and external parts to use actuators under corrosive environments.
 1. Holding valve position
KITZ pneumatic actuators do not assure no leakage. Actuators do not hold valve positions long time without continuous air supply. If you need to hold valve position long time without continuous air supply, contact KITZ Corporation or its distributors.
 2. Internal air residue of spring return type actuators
Out put torques of spring return type actuators indicate valves without internal air residue remains inside their cylinders. Please design your systems to be able to exhaust internal air residue at spring return action. If internal air residue remains in the cylinders, the out put torque will be small and valves do not open or close by spring return action.
- Air supply inlet threads are Rc $\frac{1}{4}$ as standard. Ensure to use piping tubes which diameters are $\phi 6$ and smaller. Contact KITZ Corporation to reduce operating time with larger diameter piping tube.
- It is recommended to use KITZ standard accessories for F Series actuators.
- Ensure to select solenoid valves suitable for the service conditions.
- Specify piping positions when using actuated valves with positioners since piping positions may make opening slip.
- A cap is installed on spring return type actuator's breathing port. Remove the cap before running automated operation. If the cap remains, actuator speed may become slow.
- KITZ is not responsible for any products modified by the purchasers.

WARNING

- Spring cartridge for spring return type has strongly compressed built-in spring. Careful handling of spring cartridge is required to avoid its blowing out. Do not loosen stopper bolt of spring cartridge.
- Do not remove end covers and spring covers or disassemble actuators while they are pressurized.

CAUTION

Technical data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog.

For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable.

While this catalog has been compiled with the utmost care, we assume no responsibility for errors, impropriety or inadequacy. Any information provided in this catalog is subject to from-time-to-time change without notice for error rectification, product discontinuation, design modification, new product introduction or any other cause that KITZ Corporation considers necessary. This edition cancels all previous issues.

Memo

CAUTION

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog.

For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable.

While this catalog has been compiled with the utmost care, we assume no responsibility for errors, impropriety or inadequacy. Any information provided in this catalog is subject to from-time-to-time change without notice for error rectification, product discontinuation, design modification, new product introduction or any other cause that KITZ Corporation considers necessary. This edition cancels all previous issues.


Read instruction manual carefully before use.

NOTICE

If any products designated as strategic material in the Foreign Exchange and Foreign Trade Law, Cabinet Order Concerning Control of Export Trade, Cabinet Order Concerning Control of Foreign Exchange and other related laws and ordinances ("Foreign Exchange Laws") are exported to any foreign country or countries, an export license issued by the Japanese Government will be required under the Foreign Exchange Laws.

Further, there may be cases where an export license issued by the government of the United States or other country will be required under the applicable export-related laws and ordinances in such relevant countries.

The contract shall become effective subject to that a relevant export license is obtained from the Japanese Government.



*A chrysanthemum-handle is a symbol of KITZ,
the brand of valve reliability*

ISO 9001 certified since 1989

KITZ
KITZ CORPORATION

1-10-1, Nakase, Mihama-ku, Chiba 261-8577, Japan
International Sales Dept. Phone : 81-43-299-1730, 1732 and 1733
Fax : 81-43-299-0121

— Distributed by —